

300x600MM
WALL CLADDING

SOMANY

DURAGRÉS

Timeless Elegance

SOMANY

Somany Ceramics Limited : Noida: F-36, Sector- 6; Ph.: 0120-4627900.

Ahmedabad: Office no. 7-14, 4th Floor, Aggarwal Mall, Opp. Sola Bhagwat Vidyapeeth, S.G. Road, Sola, Ph.: 079-27661103.

Registered office: 2, Red Cross Place, Kolkata 100001, Ph: 033-22487406/5913

www.somanyceramics.com | e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)



Visit us at:
www.somanyceramics.com



Find us at:
www.facebook.com/SomanyCeramic




Find us at:
www.twitter.com/SomanyCeramic



CLARO | CLAD STONE

Choice of the Superstar

CLARO
COLLECTION

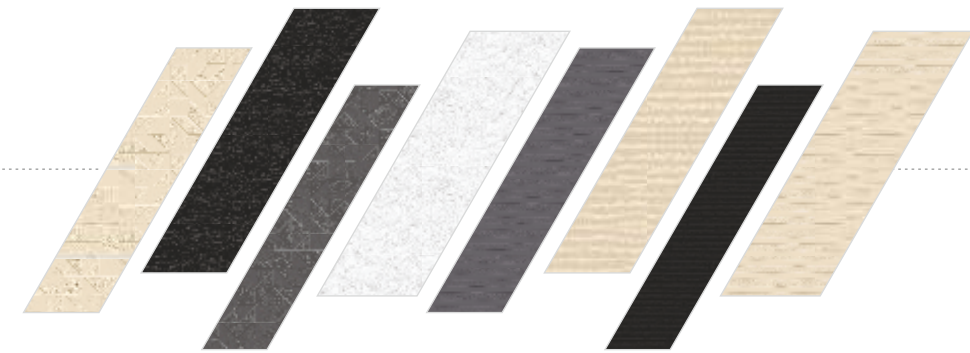

04-30

CLAD STONE



31-40



JUPITER



CLARO JUPITER NERO
MATT WITH SUGAR, 300X600MM



CLARO JUPITER WHITE
MATT WITH SUGAR, 300X600MM



CLARO JUPITER GREY
MATT WITH SUGAR, 300X600MM



CLARO JUPITER IVORY
MATT WITH SUGAR, 300X600MM




TEBAS



CLARO TEBAS NERO
MATT WITH SUGAR, 300X600MM



CLARO TEBAS WHITE
MATT WITH SUGAR, 300X600MM

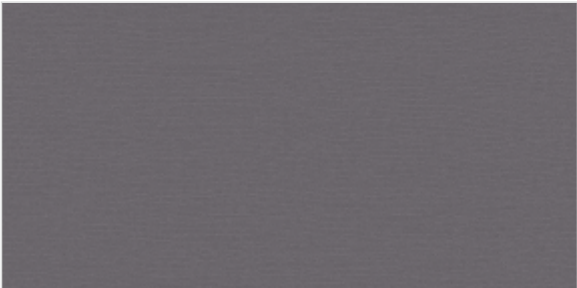

CLARO TEBAS GREY
MATT WITH SUGAR, 300X600MM



CLARO TEBAS IVORY
MATT WITH SUGAR, 300X600MM



CARTAGO



CLARO CARTAGO NERO
MATT WITH SUGAR, 300X600MM



CLARO CARTAGO WHITE
MATT WITH SUGAR, 300X600MM



CLARO CARTAGO GREY
MATT WITH SUGAR, 300X600MM




CLARO CARTAGO IVORY
MATT WITH SUGAR, 300X600MM



SLATE




CLARO SLATE NERO
MATT WITH SUGAR, 300X600MM

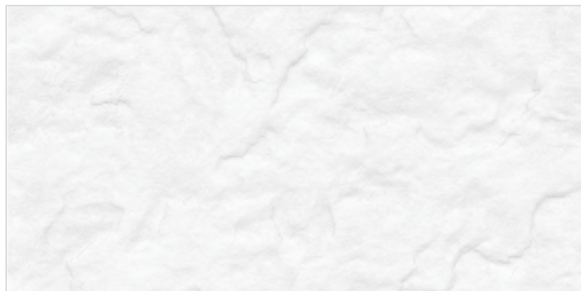

CLARO SLATE WHITE
MATT WITH SUGAR, 300X600MM



CLARO SLATE GREY
MATT WITH SUGAR, 300X600MM

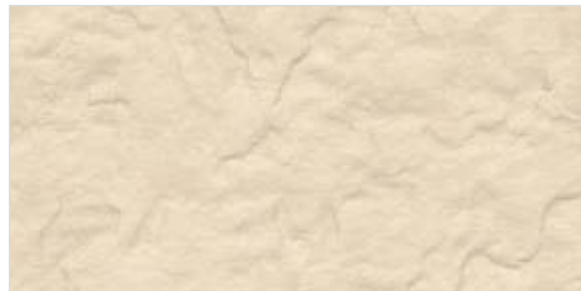

CLARO SLATE IVORY
MATT WITH SUGAR, 300X600MM



ADAMELLO



ADAMELLO GREY
RUSTIC, 300X600MM



ADAMELLO BEIGE
RUSTIC, 300X600MM



ALBRIS



ALBRIS BROWN
RUSTIC, 300X600MM



ALBRIS BEIGE
RUSTIC, 300X600MM



ALBRIS GREY
RUSTIC, 300X600MM



ALBRIS CREMA
RUSTIC, 300X600MM



COBBLE



COBBLE BROWN
RUSTIC, 300X600MM



COBBLE BEIGE
RUSTIC, 300X600MM



COBBLE BINACO
RUSTIC, 300X600MM



CRISTALLO



CRISTALLO BROWN
RUSTIC, 300X600MM



CRISTALLO GREY
RUSTIC, 300X600MM



CRISTALLO NATURAL
RUSTIC, 300X600MM



ESCOLO




ESCOLO GREY
RUSTIC, 300X600MM



ESCOLO BROWN
RUSTIC, 300X600MM



ESCOLO BEIGE
RUSTIC, 300X600MM

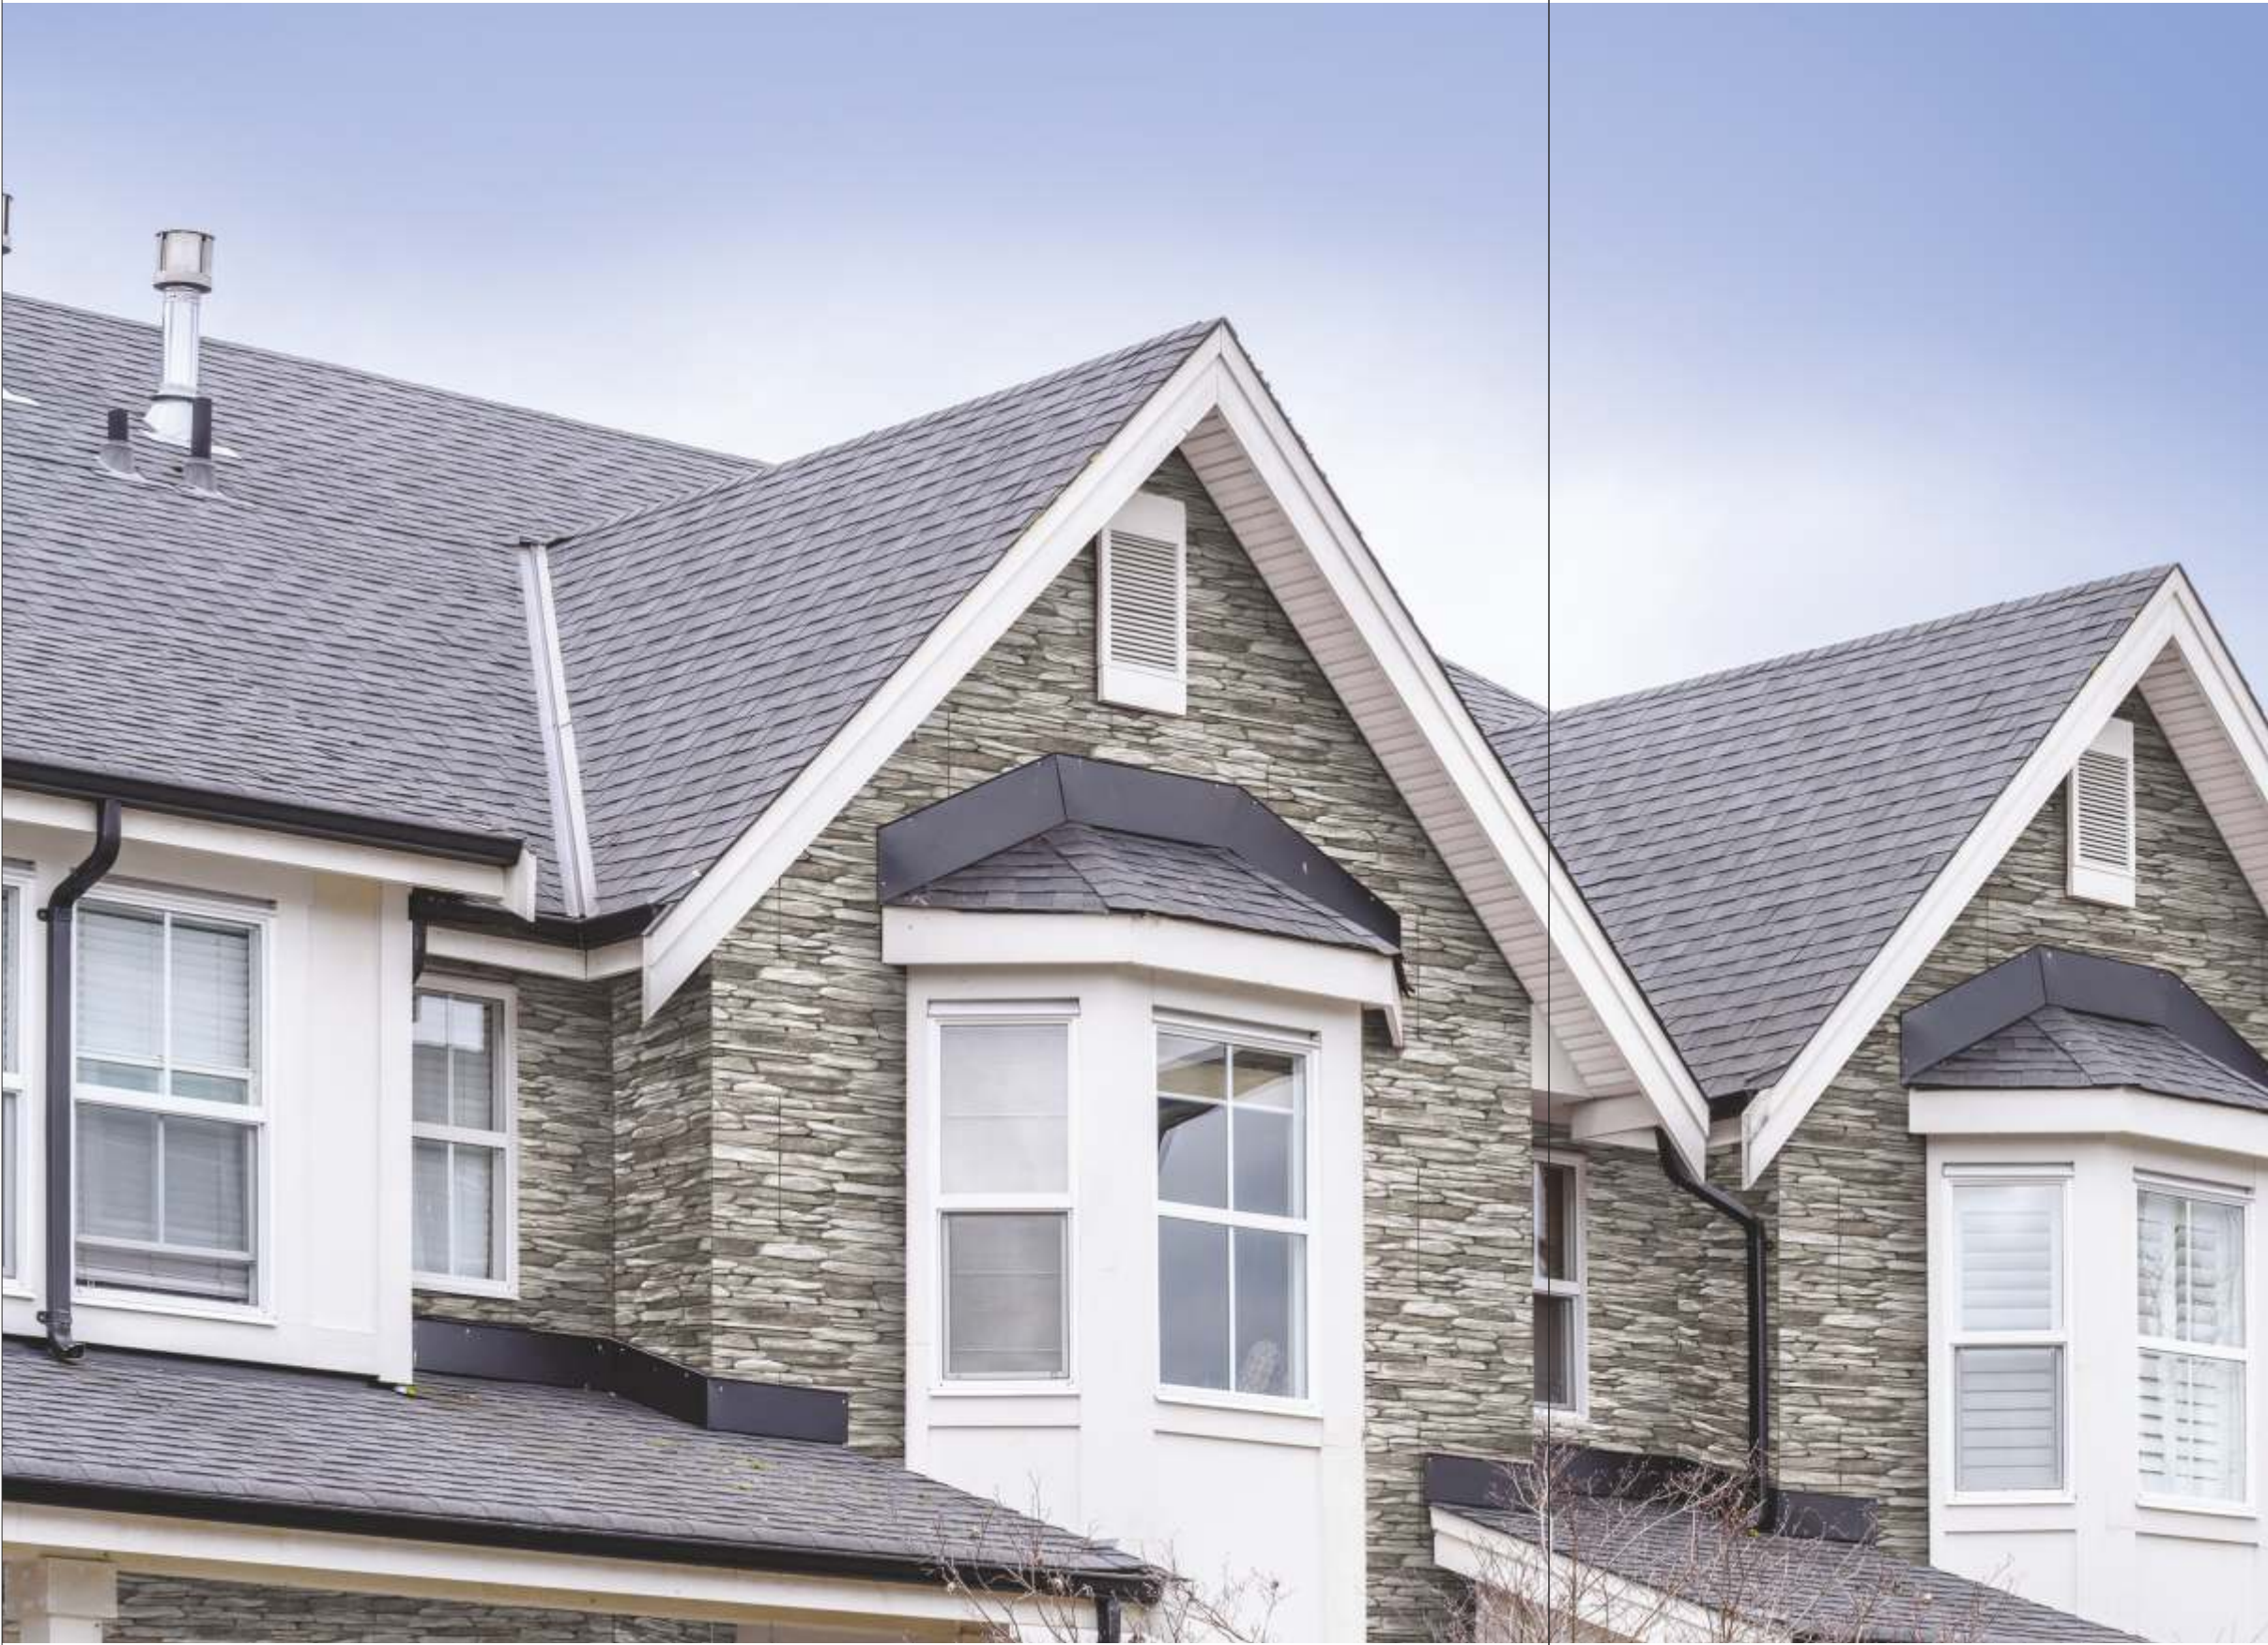

FELSEN



FELSEN GREY
RUSTIC, 300X600MM



FELSEN BROWN
RUSTIC, 300X600MM

FORNODO



FORNODO GREY DARK
RUSTIC, 300X600MM



FORNODO GREY LIGHT
RUSTIC, 300X600MM





GRIVOLA



GRIVOLA BROWN
RUSTIC, 300X600MM



GRIVOLA COTTO
RUSTIC, 300X600MM



GRIVOLA GRIS
RUSTIC, 300X600MM



ORTLER



ORTLER BEIGE
RUSTIC, 300X600MM



ORTLER BROWN
RUSTIC, 300X600MM



ORTLER GRIS
RUSTIC, 300X600MM



RODADO



RODADO VERDE
RUSTIC, 300X600MM



RODADO BROWN
RUSTIC, 300X600MM

ROTECK



ROTECK BROWN
RUSTIC, 300X600MM



ROTECK BEIGE
RUSTIC, 300X600MM



ROTECK GREY
RUSTIC, 300X600MM





STRIDENT



STRIDENT BROWN
RUSTIC, 300X600MM



STRIDENT BEIGE
RUSTIC, 300X600MM



STRIDENT BINACO
RUSTIC, 300X600MM


CIVILTA




CIVILTA BROWN
RUSTIC, 300X600MM



CIVILTA BEIGE
RUSTIC, 300X600MM

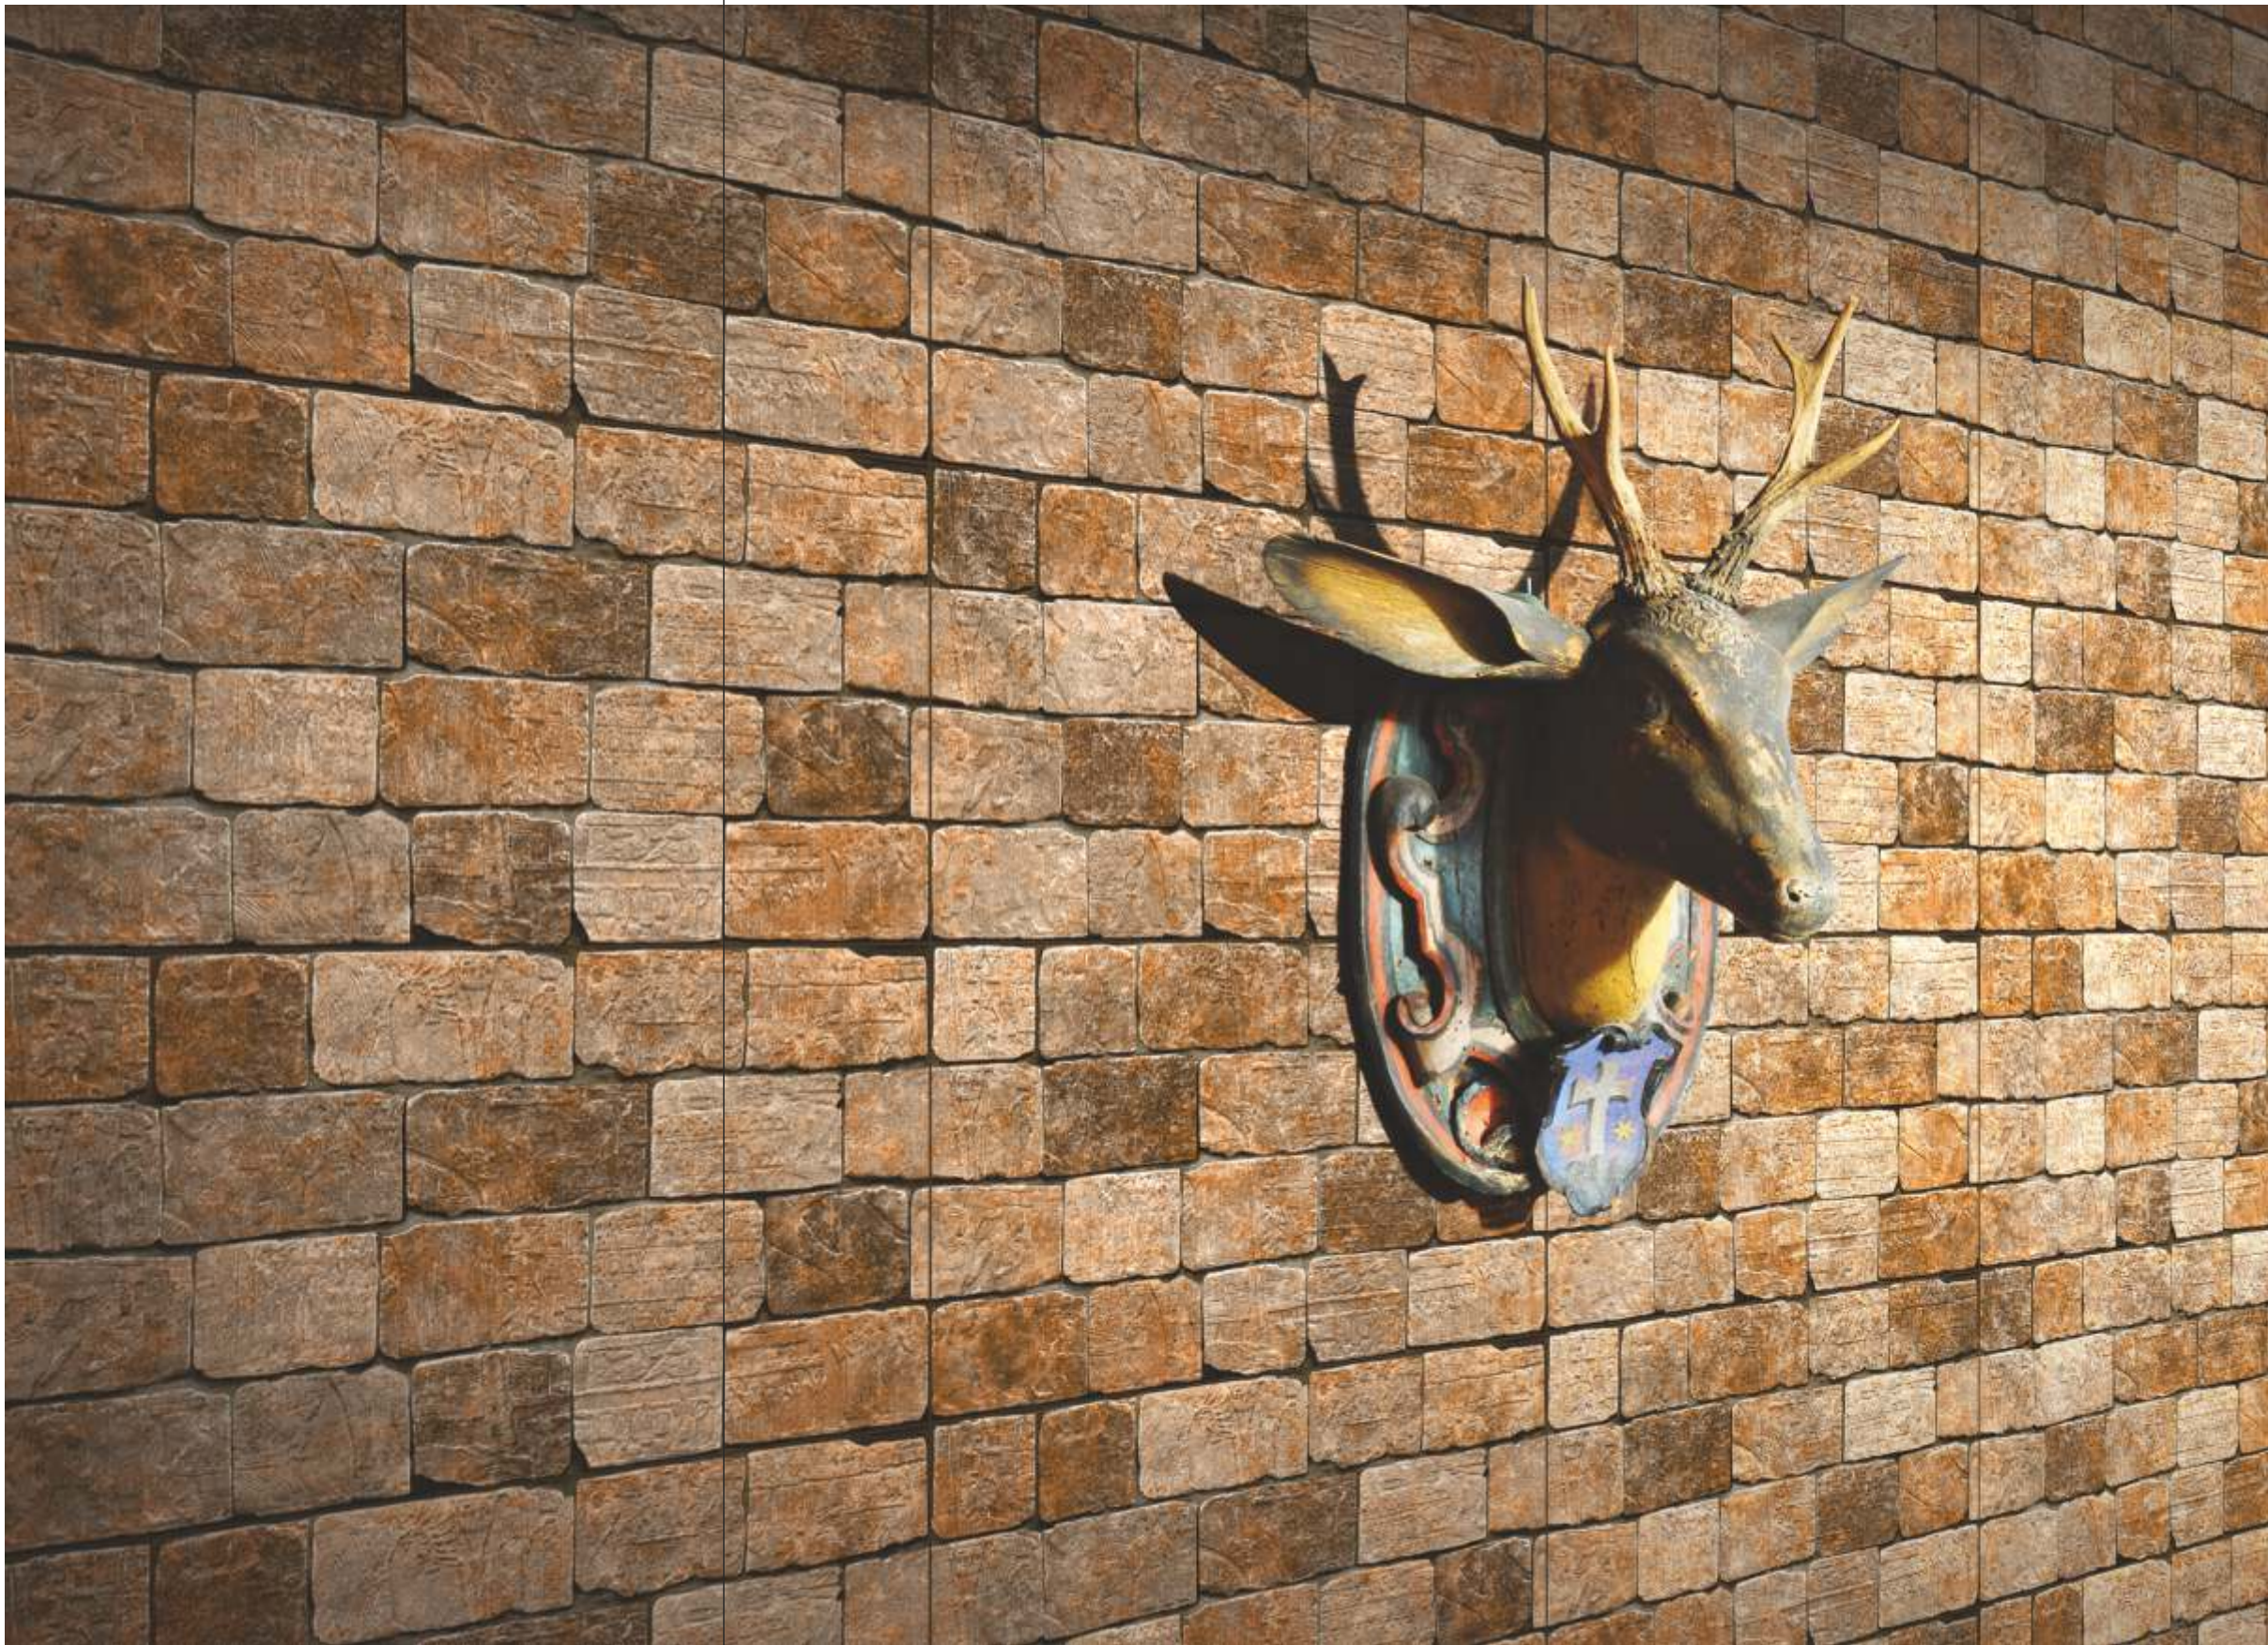

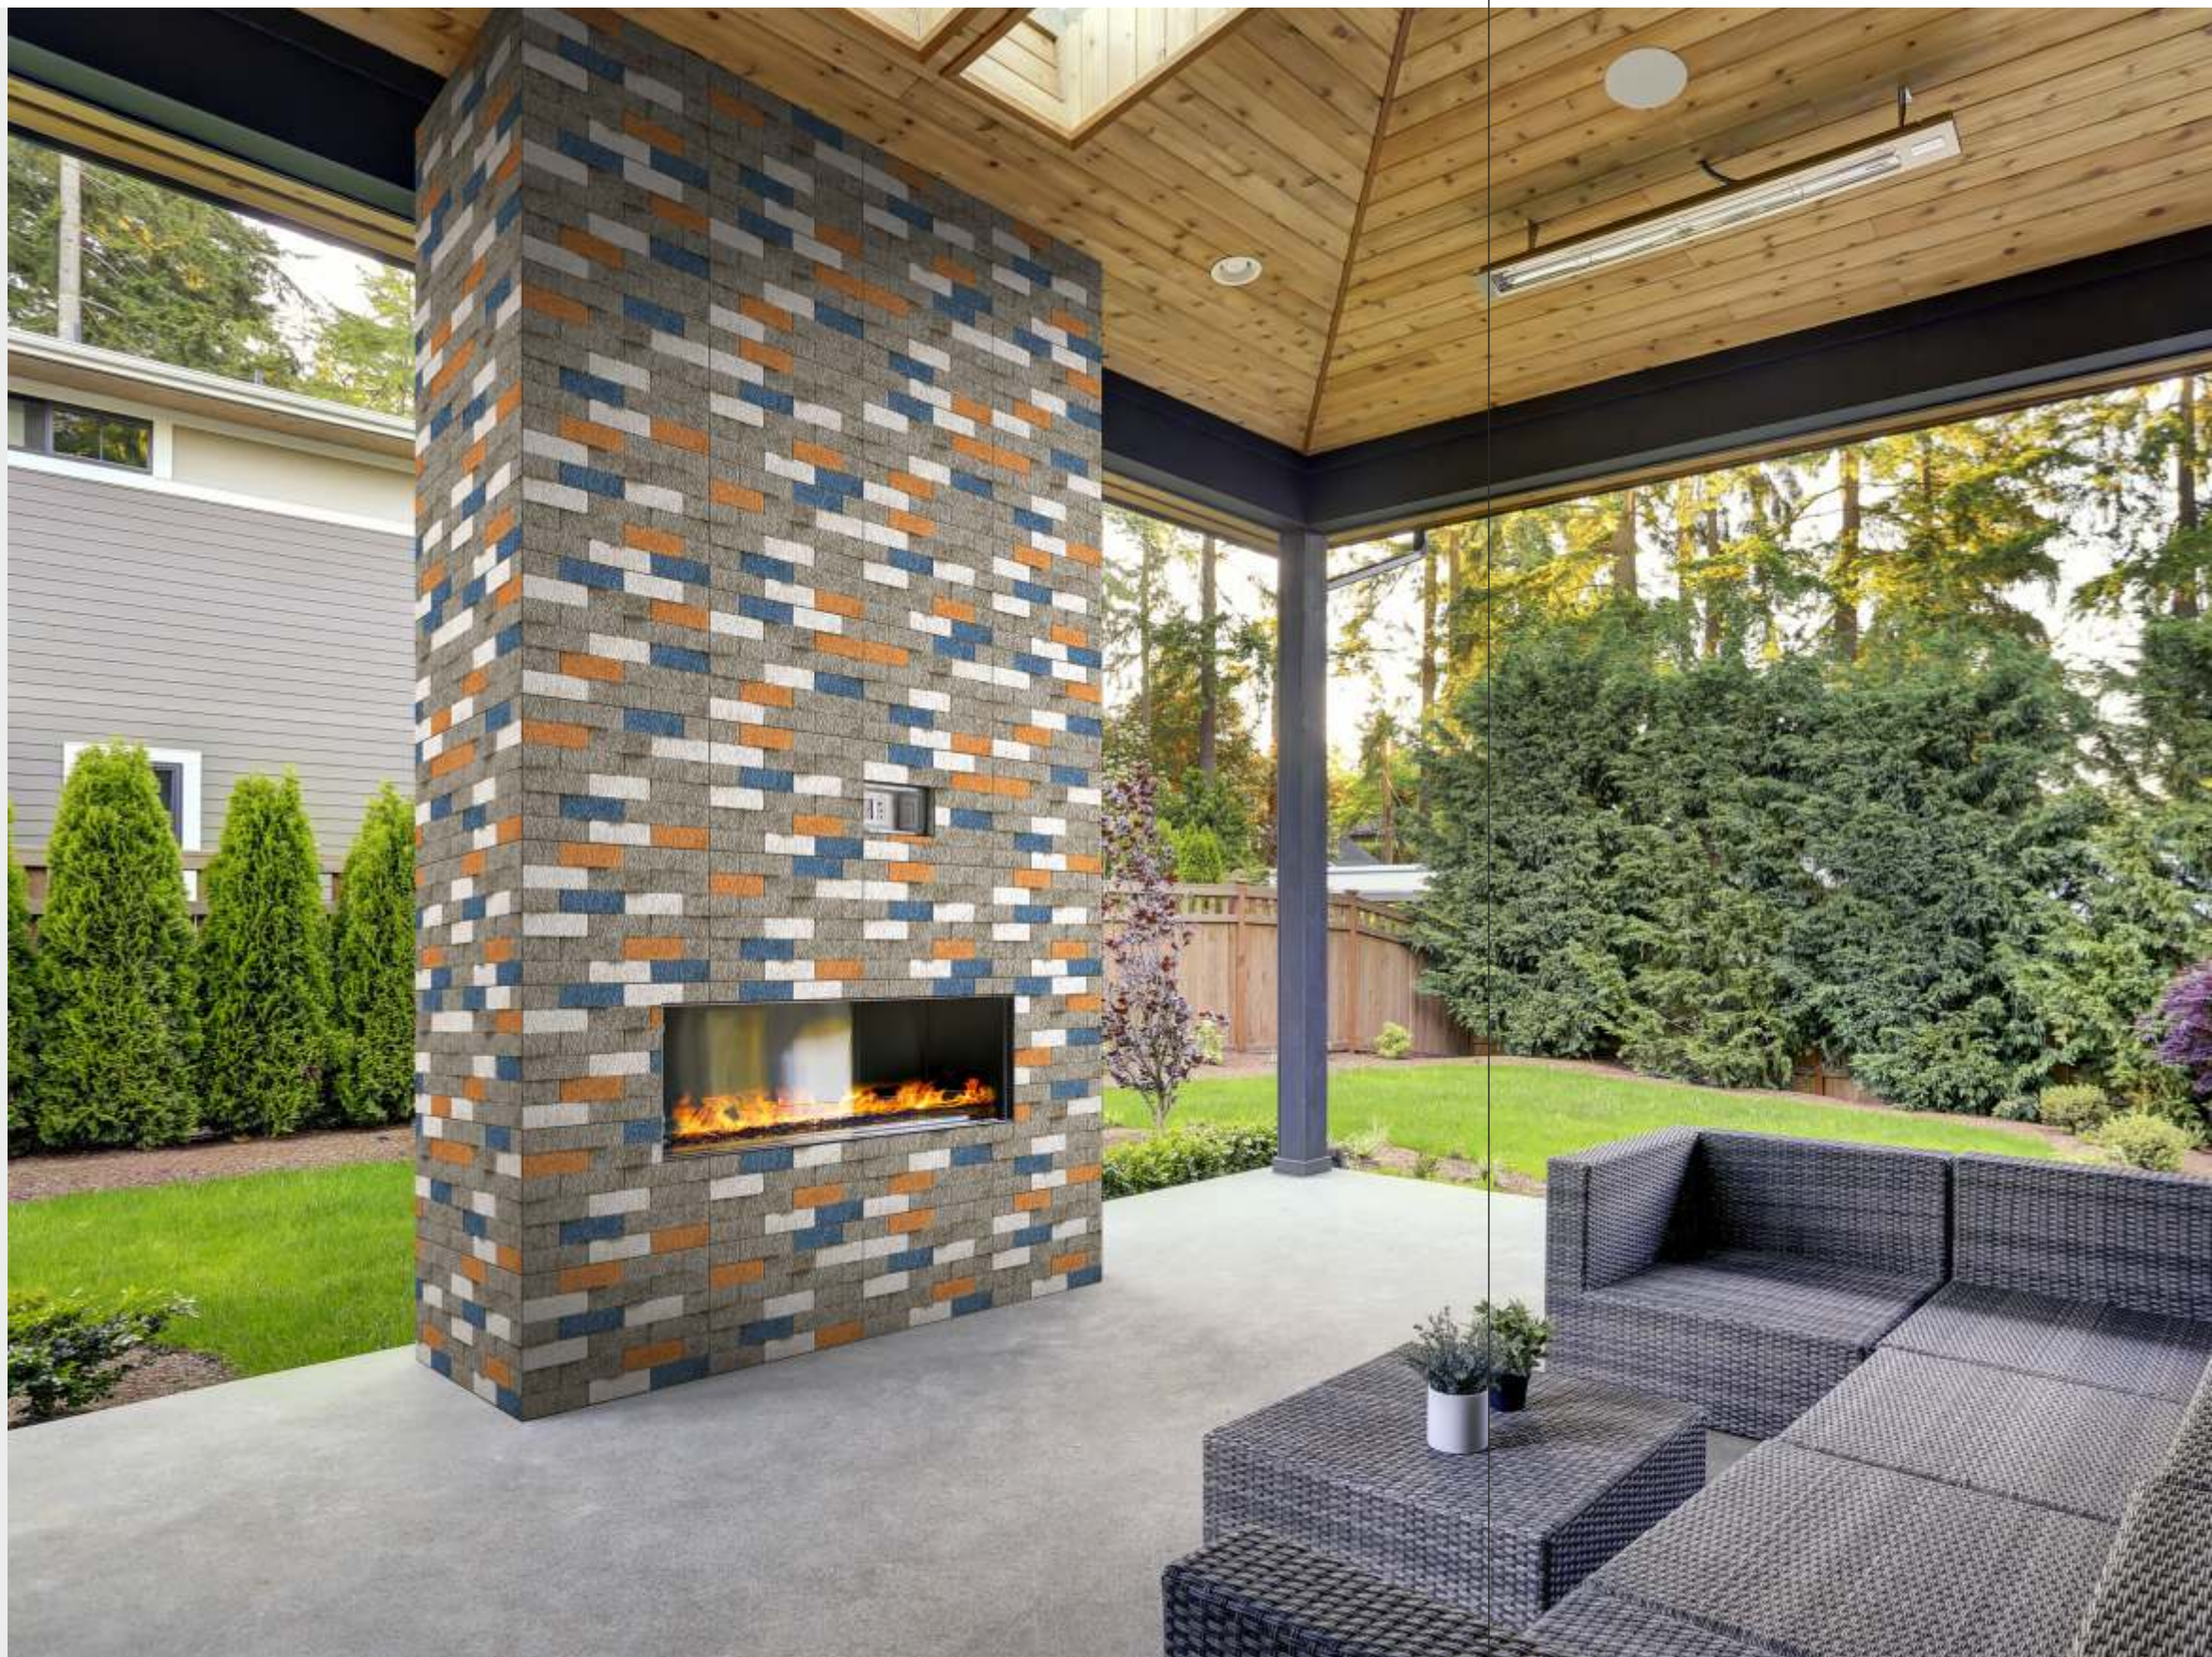

GLANZ ALBRIS



NEW ARRIVAL

GLANZ ALBRIS COTTO
RUSTIC, 300X600MM



NEW ARRIVAL

GLANZ ALBRIS GRIS
RUSTIC, 300X600MM

CRYSTALLO



GLANZ CRYSTALLO GRIS
RUSTIC, 300X600MM





GLANZ FORNODO



GLANZ FORNODO COTTO
RUSTIC, 300X600MM



GLANZ FORNODO GRIS
RUSTIC, 300X600MM




GLANZ GRIVOLA



GLANZ GRIVOLA OLIVE
RUSTIC, 300X600MM



GLANZ GRIVOLA ROSSO
RUSTIC, 300X600MM

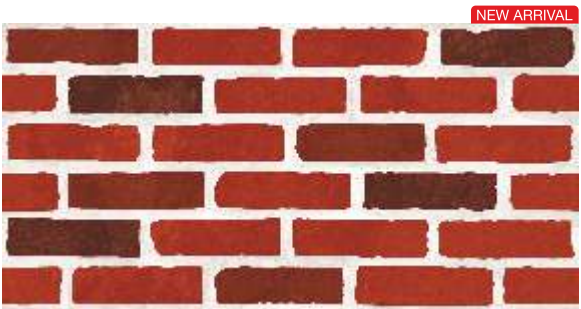

GLANZ GRIVOLA TERRACOTTA
RUSTIC, 300X600MM

TECHNICAL SPECIFICATION

Packaging detail for GVT body vitrified Tiles 300X600 MM

Nominal Size(mm)	Thickness(in mm)	Avg. Wt.(kg) per carton	No. of tile per carton	Coverage area per carton
300X600MM	10.2	21.0 kgs	6	1.08 sq.mtr./11.63 sq. ft.

Technical Specification for GVT body vitrified Tiles 300X600 MM

Characteristics	Requirement as per IS 15622 :2006 0.08<E≤3 Group B1b	OUR VALUE FOR 300X600mm GVT	Test Method
A. Dimension & Surface Quality			
Length & Width	± 0.10%	± 0.10%	EN 98/IS 13630 Part 1/ ISO 10545-2
Thickness	± 4.0%	± 4.0%	
Dev Straightness of Side	± 0.10%	± 0.10%	
Dev Rectengularity	± 0.10%	± 0.10%	
Dev Max Center curvature (%)	± 0.2%	± 0.2%	
Dev Max Edge curvature (%)	± 0.2%	± 0.2%	
Dev Max Corner warpage (%)	± 0.2%	± 0.2%	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B. Physical Properties			
Water Absorption	Av. ≤3 %, Individual 3.3 max	Av 0.15%, Max 0.25 %	EN 99/ IS 13630 Part 2/ ISO 10545-3
Modulus of Rupture [N/mm2]	Av 38, Individual 35 min	38 min	EN 100/ IS 13630 Part 6/ISO 10545-4
Breaking Strength in N	1200 Min.	Min. 1000 for deep Punch Min. 1200 for Plain Punch	
Surface Abrasion Resistance	Min Class III (commercial) Min Class II (Residential)	Class V	EN 201/IS 13630 Part 11/ ISO 10545-7
Scratch Hardness of surface (Mohs)	Min 6 (commercial) Min 5 (Residential)	Min 6	EN 101 /IS 13630 Part 13
Coefficient of linear thermal expansion from embiant temperature to 100 0 C	7 X 10 ⁻⁶ K ⁻¹ max	7 X 10 ⁻⁶ K ⁻¹ max	EN 103/IS 13630 Part 4/ ISO 10545-8
Thermal Shock Resistance	10 cycle min	10 Cycle passed	EN 104/IS 13630 Part 5
Frost Resistance	Required	Resistance	EN 202/IS 13630 Part 9/ISO 10545-9
C. Chemical Resistance			
Stain Resistance	Class 1 Min	Class 1	EN 122/IS 13630 Part 8
Resistance to household chemicals	Min Class AA	Class A	
Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Class AA	

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see physical sample before placing the order *Technical specifications for Somany Duragres tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation, company will not entertain complaints, once the tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.